G-19 MAP TRACKING User's Guide

VSDP Setting Up

1. For the first time user, copy the whole VSDP XP to your hard drive.
2. Execute the ***"vsbsetup.exe"*** only once.

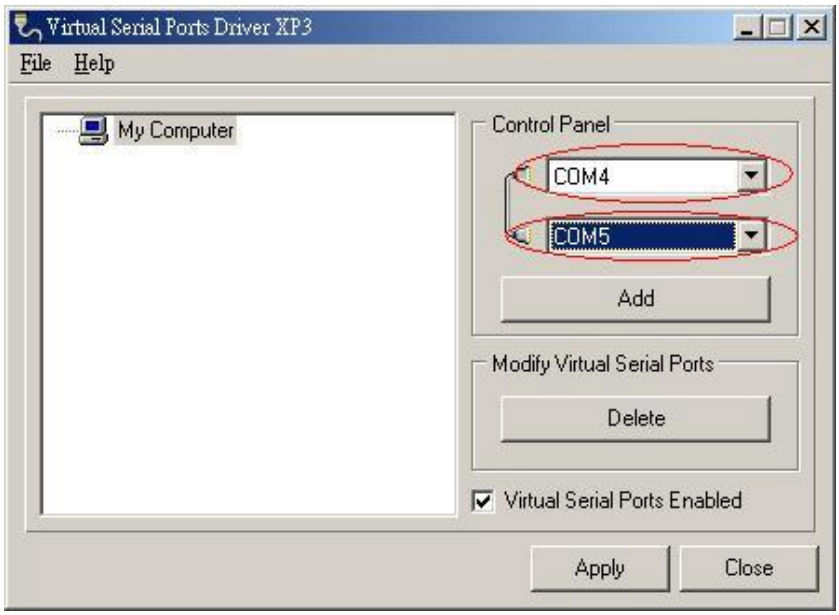

3. Then execute ***"vspdconf.exe"*** and you will see the above window.
4. Select the COM ports needed.

PS: The COM4 is for Destination COM and COM5 is the COM port for GPS map.

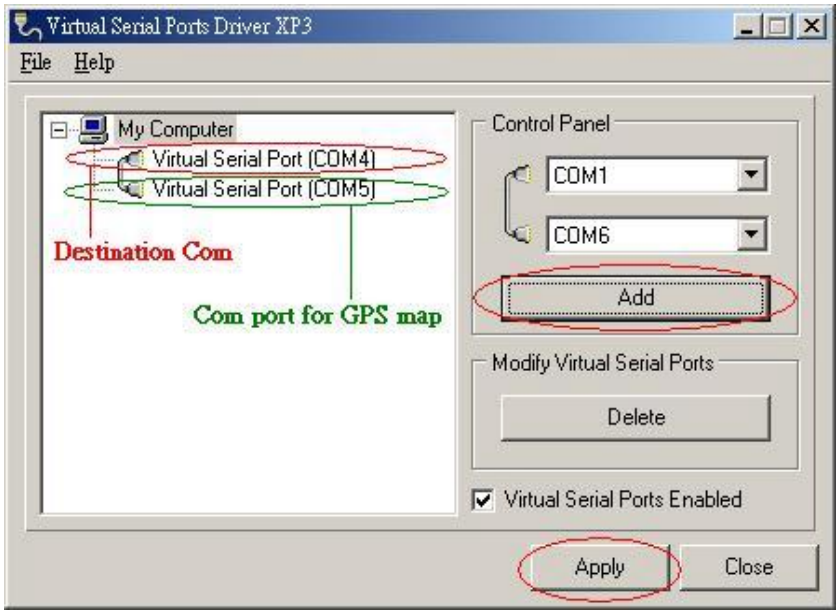

5. Click on ***"Add"*** and you will see the window below.
6. Click on ***"Apply"*** to save the settings.
7. Close the window.

Com Port Set Up For G-19 MAP TRACKING

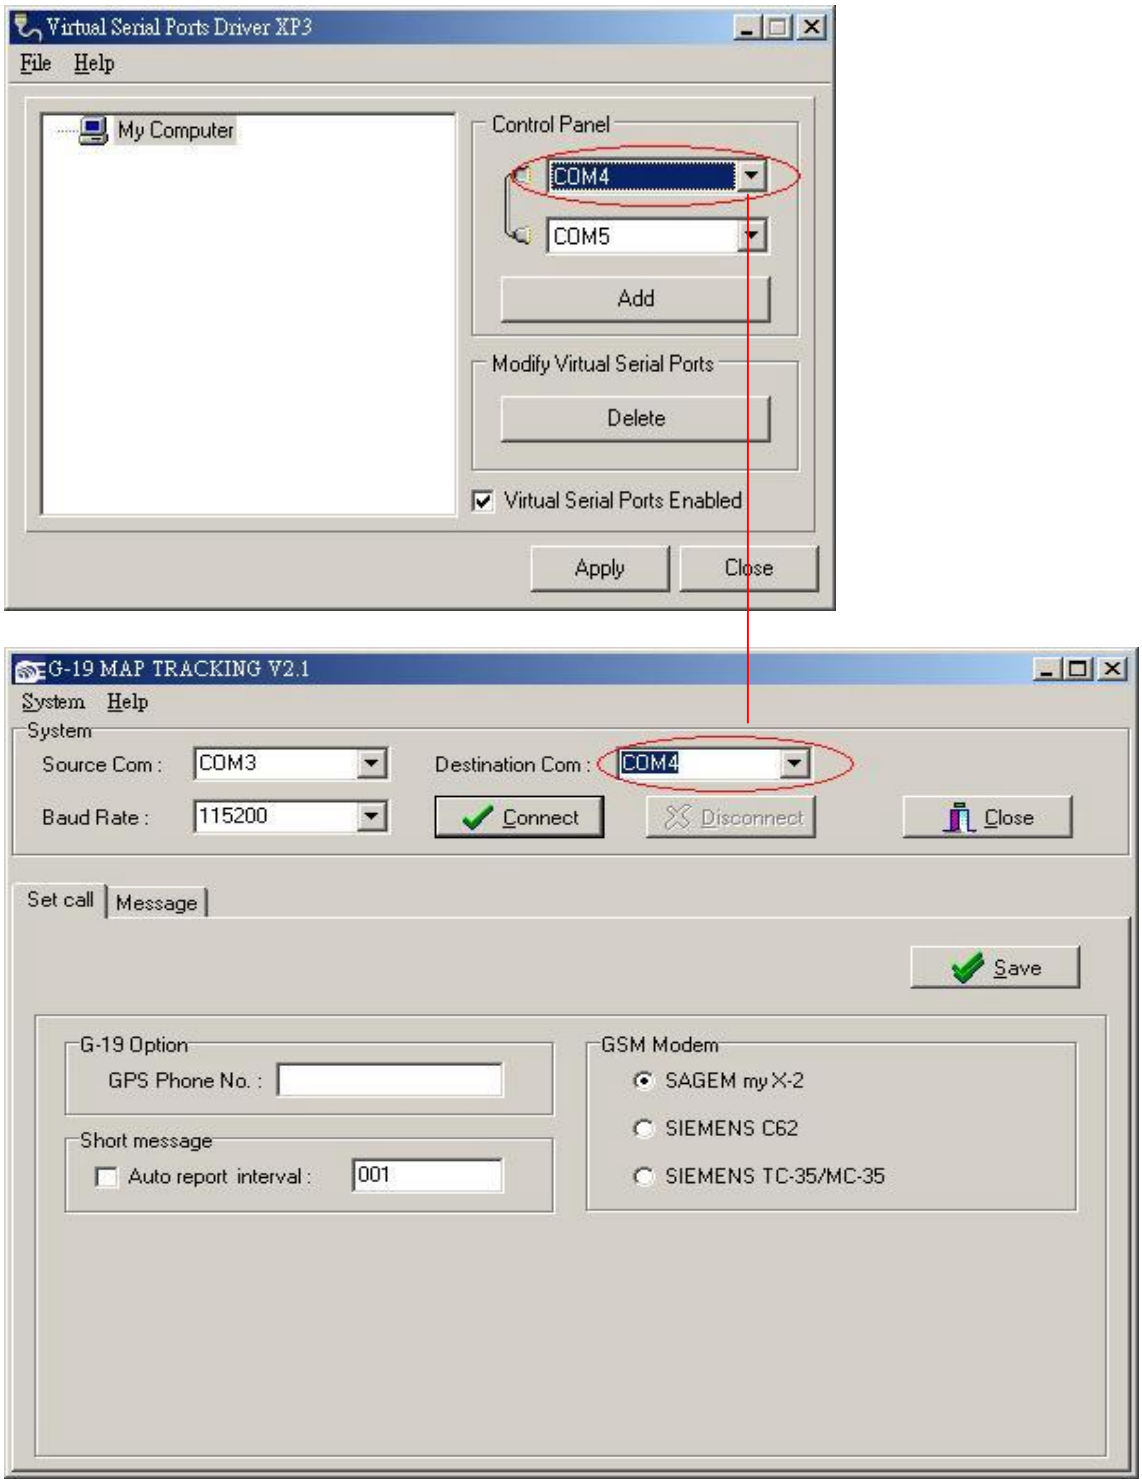

1. Before starting with ***"G-19 MAP TRACKING"***, make sure you have defined the COM ports in VXDP XP3.
2. ***Source Com*** is where you connect your cellular phone to computer.
3. ***Destination Com*** is corresponding to the first Com on VXDP.
4. The second Com on VXDP is the COM port for GPS map.

5. Baud Rate is normally to be set at ***115200***.
6. Then click on ***"Connect"***.
7. The differences between G-19 Map Tracking V2.1 and V1.1 are:
   a. Inbuilt GSM Modem (Sagem myX-2 / Simens C62 / Siemens TC-35,MC-35).

Phone Numbers Setting

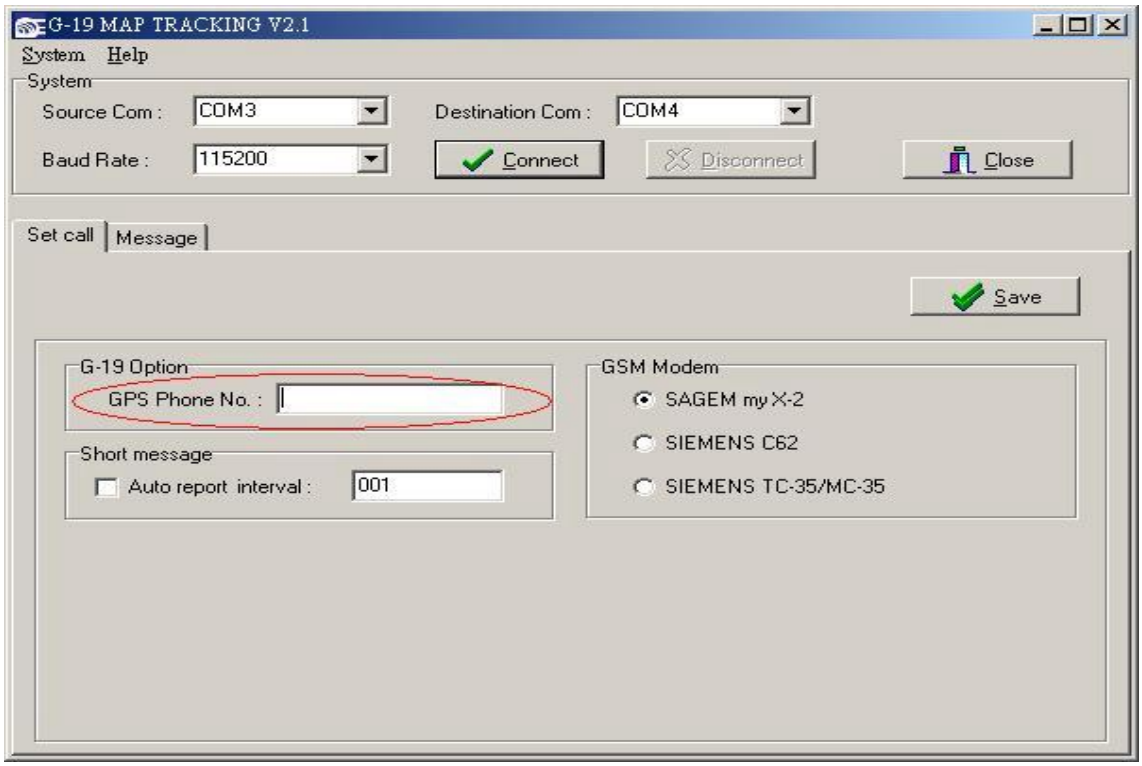

GPS Phone No: The cellular number of G-19/G-19B.

Select GSM Modem

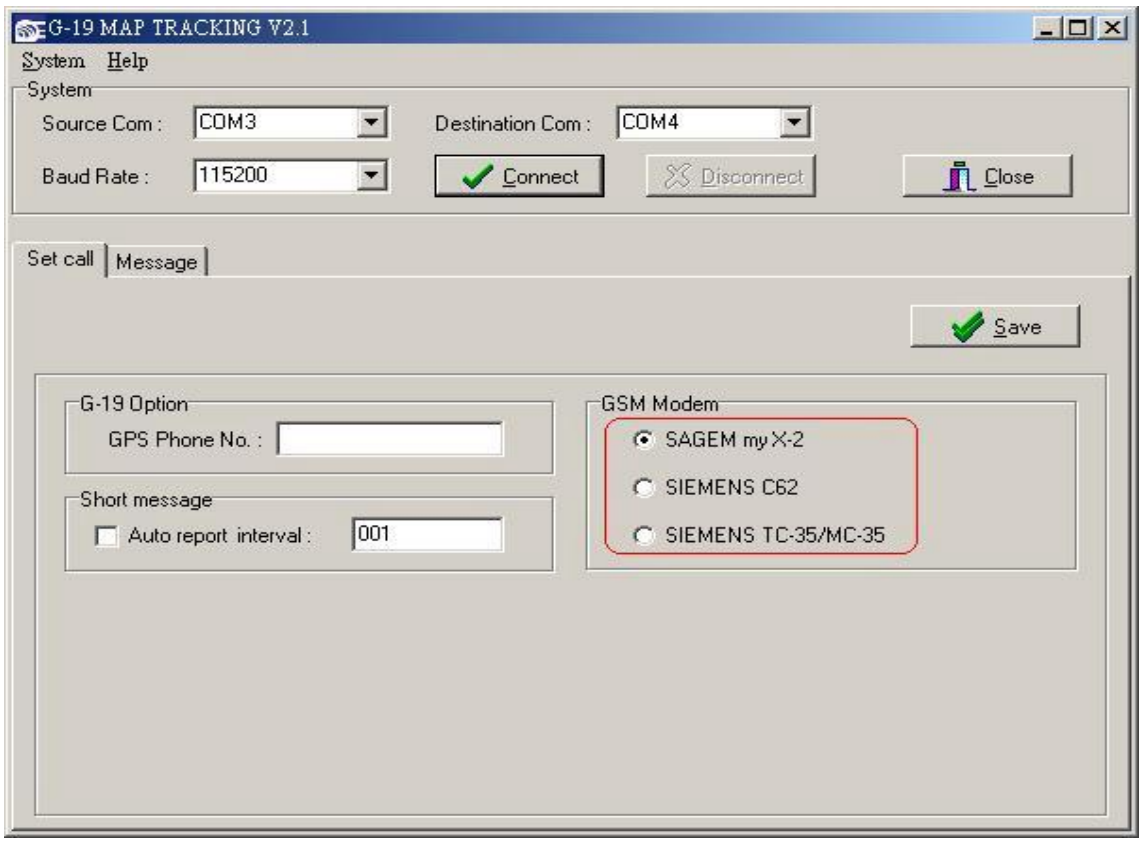

Please choose the assigned GSM Modem (V2.1 is available for SAGEM myX-2 & SIEMENS C62 & Siemens TC-35/MC-35 only)

Save Settings

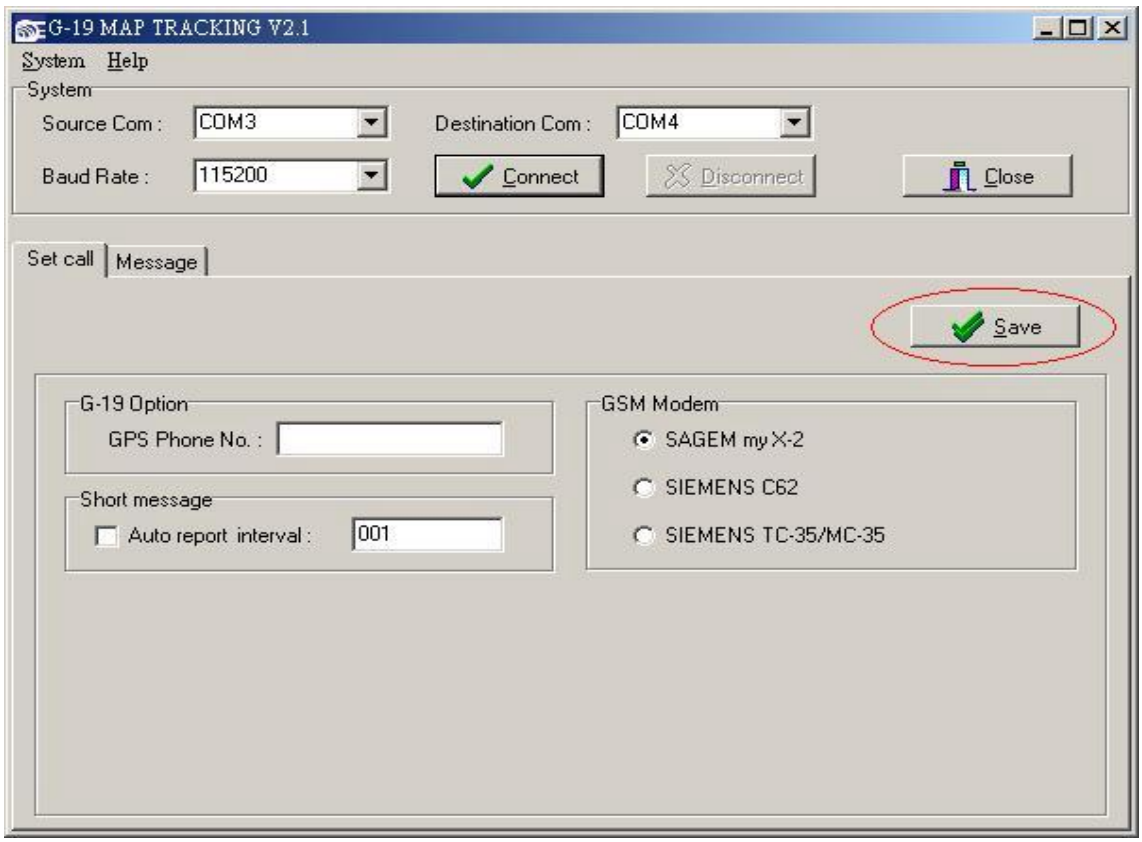

Click on ***"Save"*** to save the settings.

Connect The Cellular Phone and Computer

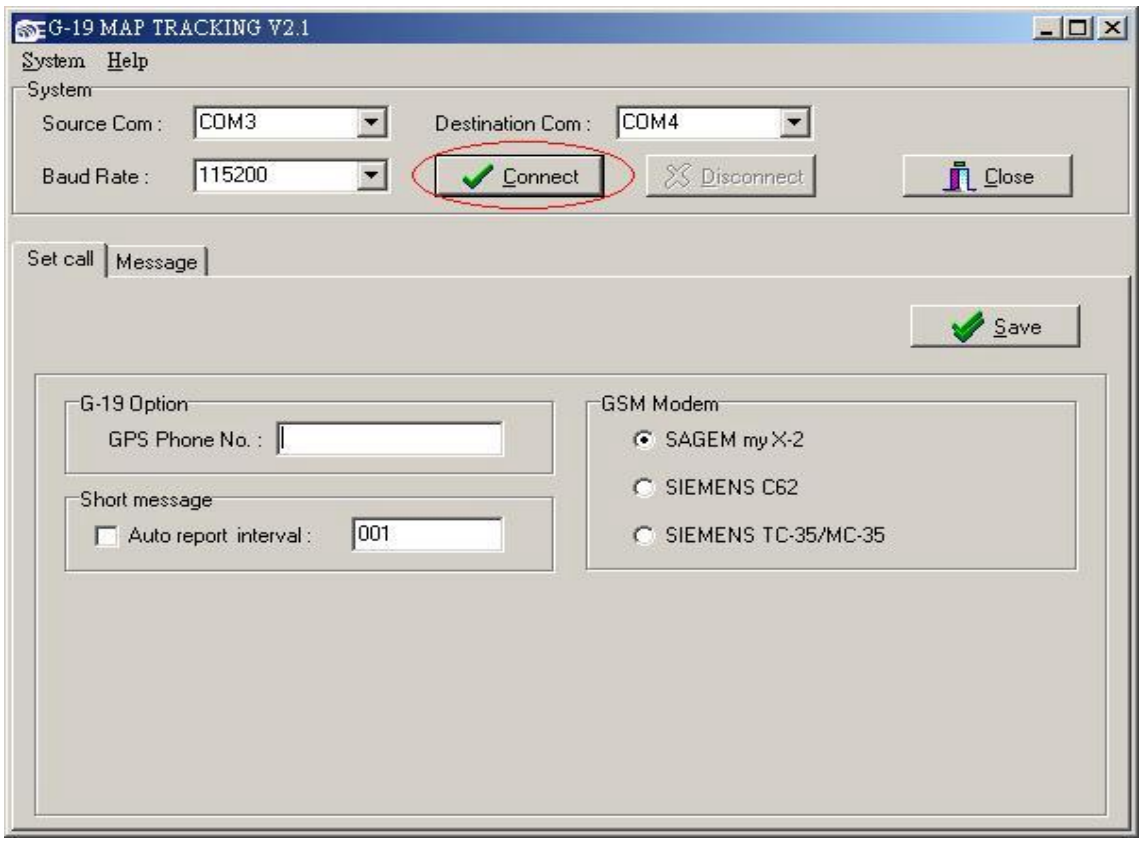

Click ***"Connect"*** to connect the cellular phone to your computer.

Message Board

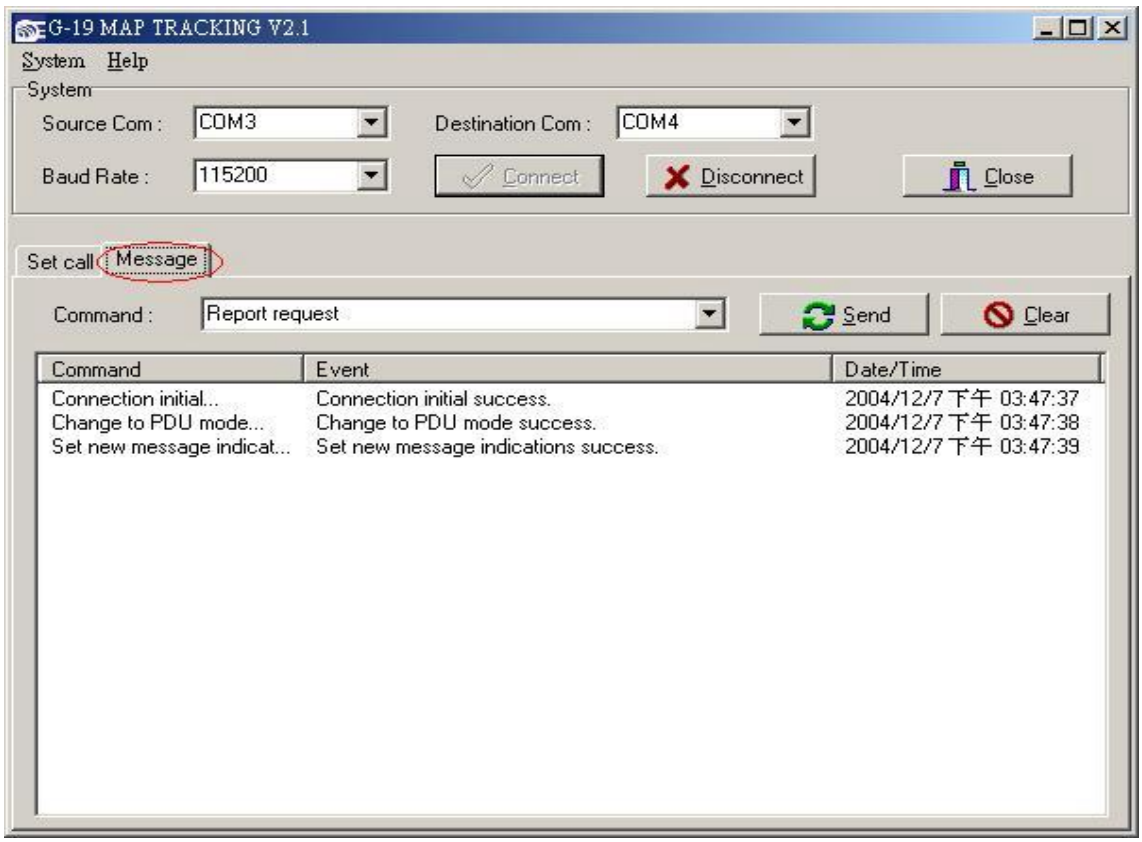

Click the ***"Message"*** and you will see the message board.

Report Request

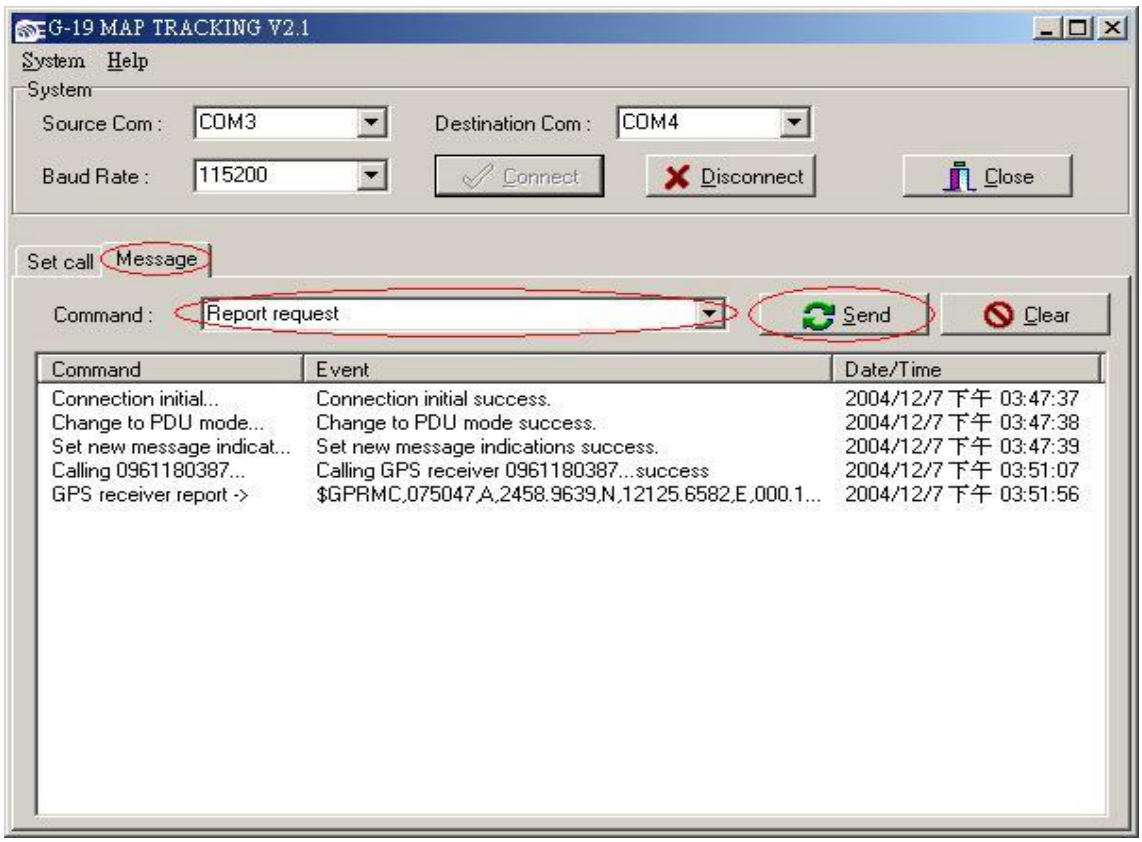

1. Select ***"Report request"*** and click on ***"Send"*** to request current location of the G-19/G-19B.
2. Open your e-map (***Fugawi*** or ***MS Street & Strip 2004***) and you should read the point from the map.

Auto Report Interval Setting

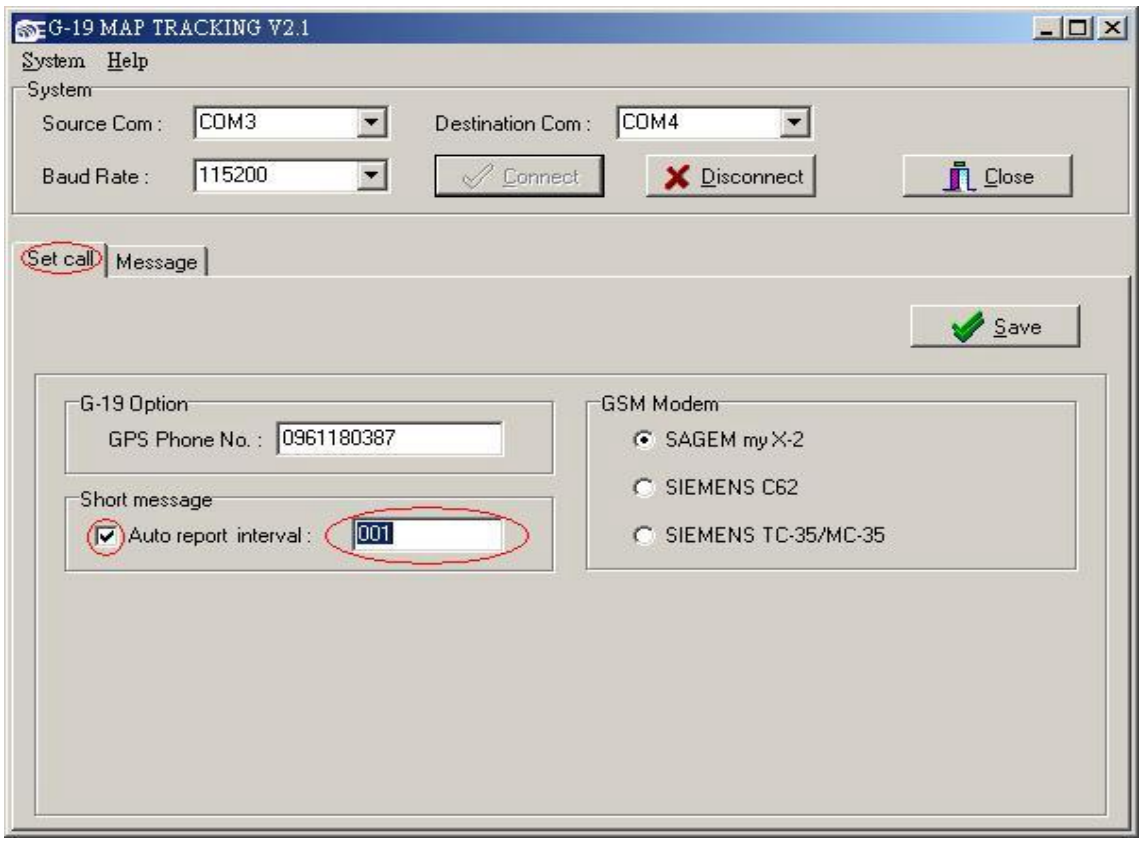

1. Choose the ***"Set Call"*** board.
2. Type in the time interval (***1~999 minutes***) that you need.
3. Check the ***"Auto report interval"*** to be true.

Clear Message Board

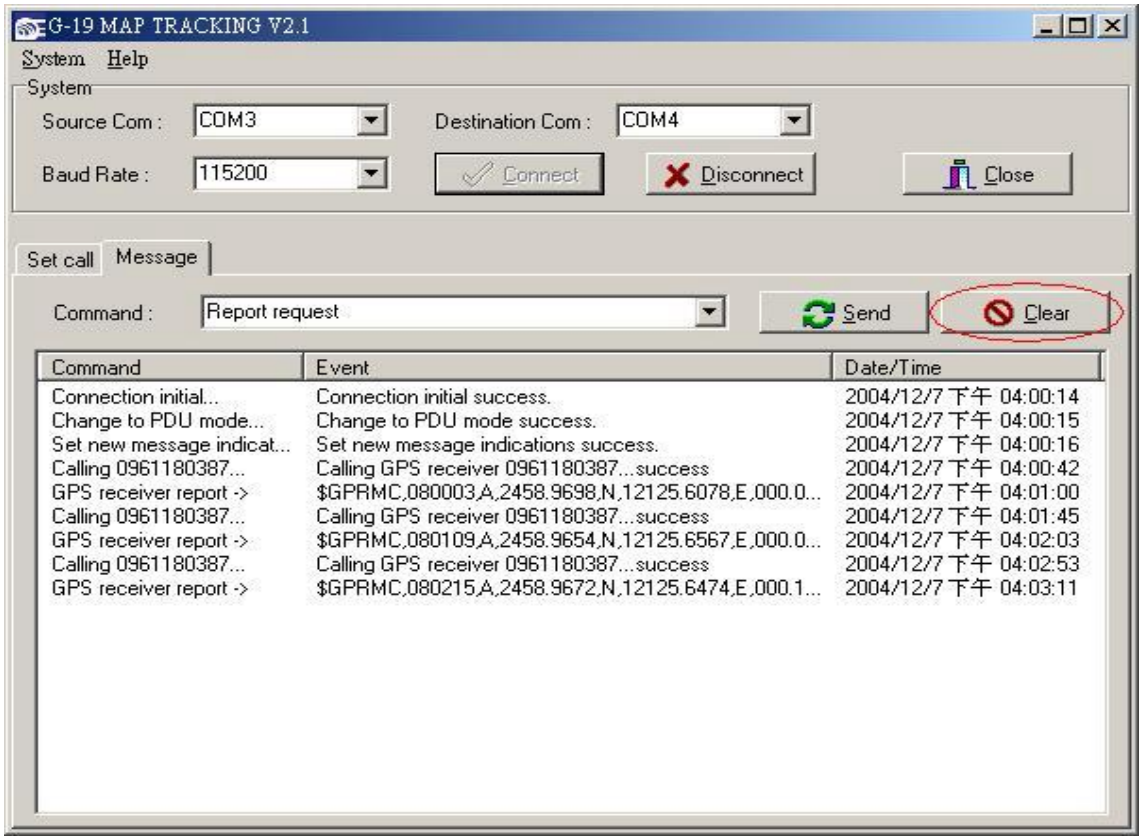
G-19 MAP TRACKING V2.1
System Help
System
Source Com : COM3
Destination Com : COM4
Baud Rate : 115200
Connect
Disconnect
Close
Set call
Message
Command : Report request
Send
Clear
Command
Event
Date/Time
Connection initial... Connection initial success. 2004/12/7 下午 04:00:14
Change to PDU mode... Change to PDU mode success. 2004/12/7 下午 04:00:15
Set new message indicat... Set new message indications success. 2004/12/7 下午 04:00:16
Calling 0961180387... Calling GPS receiver 0961180387...success 2004/12/7 下午 04:00:42
GPS receiver report -> $GPRMC,080003,A,2458.9698,N,12125.6078,E,000.0... 2004/12/7 下午 04:01:00
Calling 0961180387... Calling GPS receiver 0961180387...success 2004/12/7 下午 04:01:45
GPS receiver report -> $GPRMC,080109,A,2458.9654,N,12125.6567,E,000.0... 2004/12/7 下午 04:02:03
Calling 0961180387... Calling GPS receiver 0961180387...success 2004/12/7 下午 04:02:53
GPS receiver report -> $GPRMC,080215,A,2458.9672,N,12125.6474,E,000.1... 2004/12/7 下午 04:03:11

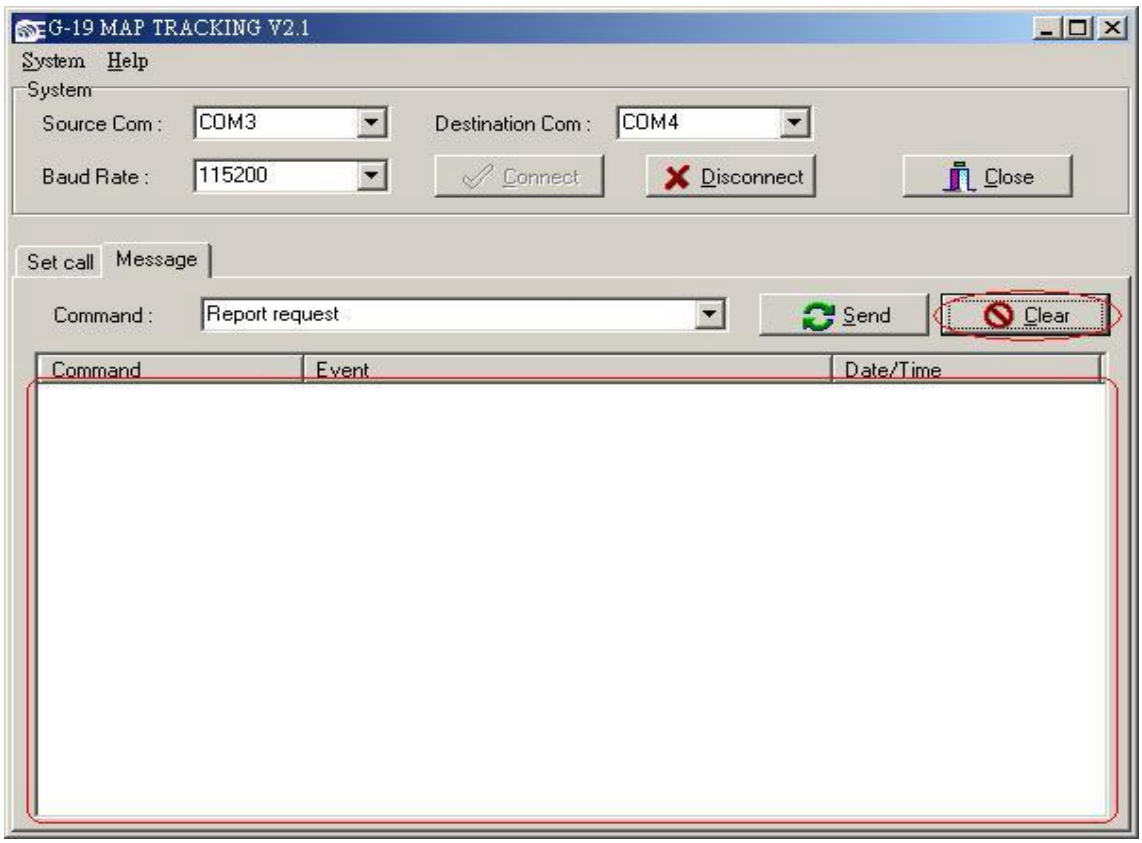

Click on ***"Clear"*** to clear the all history in the board.